


HT-CPCG-1

Hard-Wired Power Connection Kit Installation Instructions

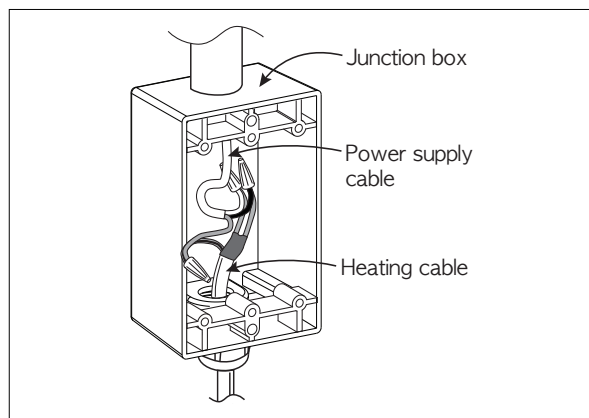

- HT-CPCG-1 is a hard-wired power connection kit for use with CRGX and LSRX with -CR suffix self-regulating heating cables.
- The enclosed kit includes materials for one power connection.
- HT-CPCG-1 is used to connect CRGX and LSRX with -CR suffix heating cable into an electrical junction box for direct wiring and allows a maximum circuit breaker size up to 40A.
- If the junction box is metal it is required to be bonded to ground per NEC and/or CEC.


Tools Required

- Utility knife
- Heavy duty scissors
- Needle nose pliers
- Heat gun
- Screwdriver
- Wire stripper

Additional Materials Required

- Junction box:
 - All components must be listed for the US and certified for Canada
 - 120/240 volt with suitable approval for the specific location.
 - 1/2 inch NPT thread compatible.
 - Rated for outdoor use.







Kit Contents

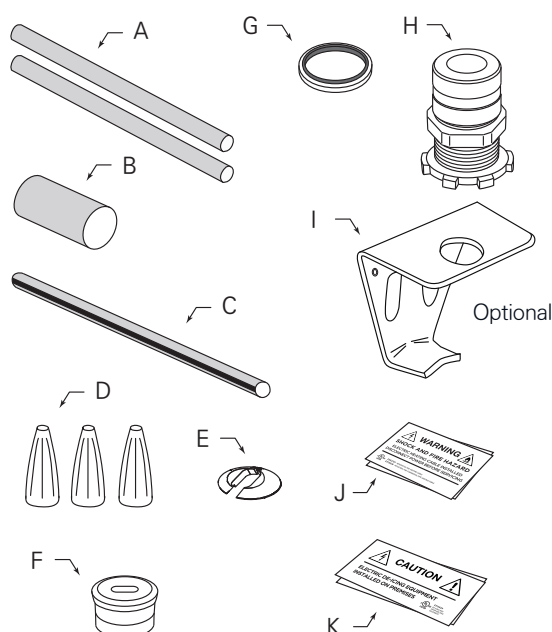

Item	Description	Dimension	Qty.
A	Heat shrink tubes (Black)	0.15×5.5 in.	2
B	Heat shrink tube (Black)	0.47×1.5 in.	1
C	Heat shrink tube (Green/Yellow)	0.16×6.5 in.	1
D	Wire nuts		3
E	Nylon washer (Blue)		1
F	Black grommet (Silicon)		1
G	Sealing ring		1
H	1/2" NPT Metal gland with lock nut and gland cap		1
I	Pipe mounting bracket (optional)		1
J	Warning label for pipe installations		2
K	Caution label for roof installations		2


HT-CPCG-1

Hard-Wired Power Connection Kit

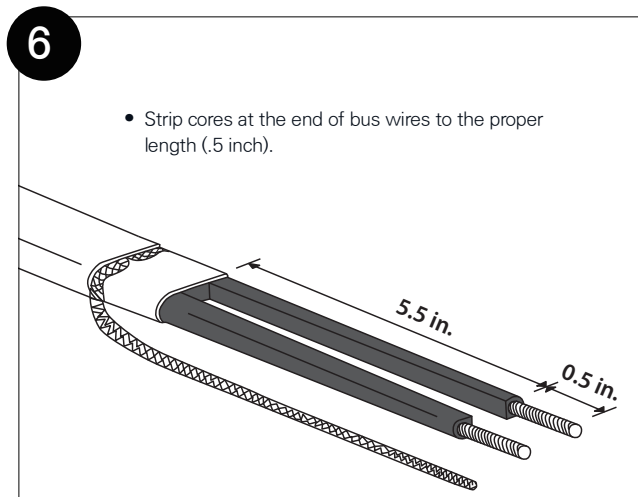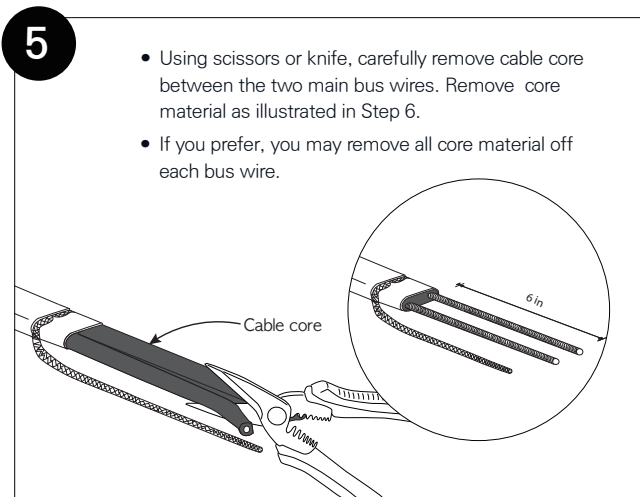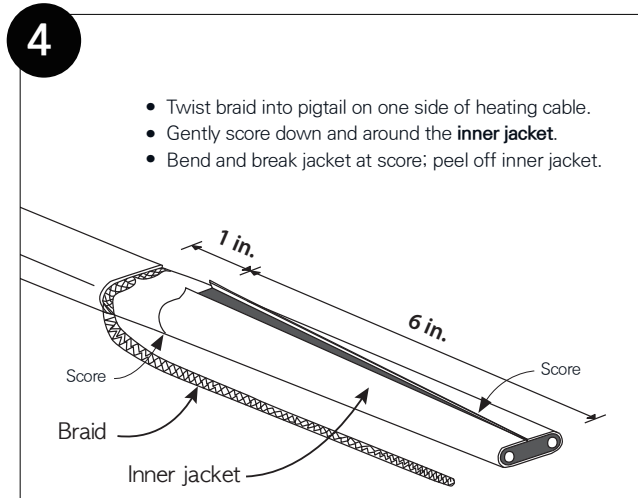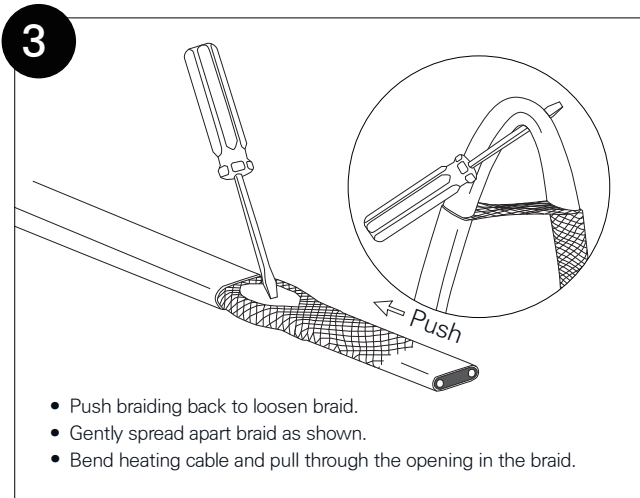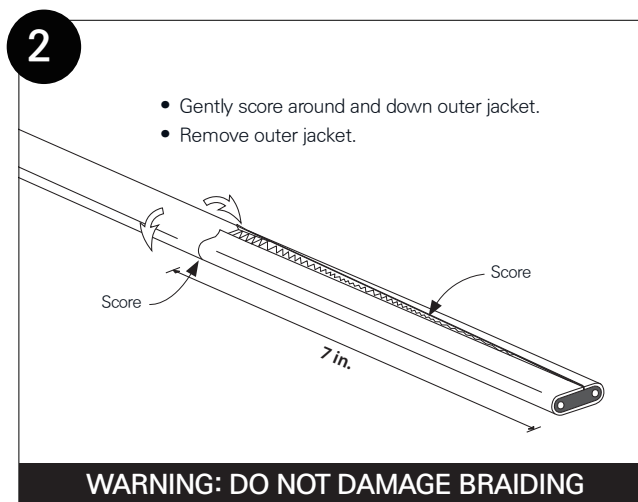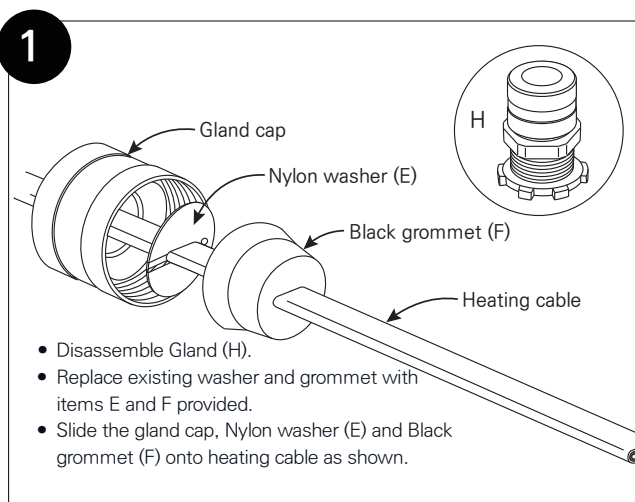







HT-CPCG-1

Hard-Wired Power Connection Kit

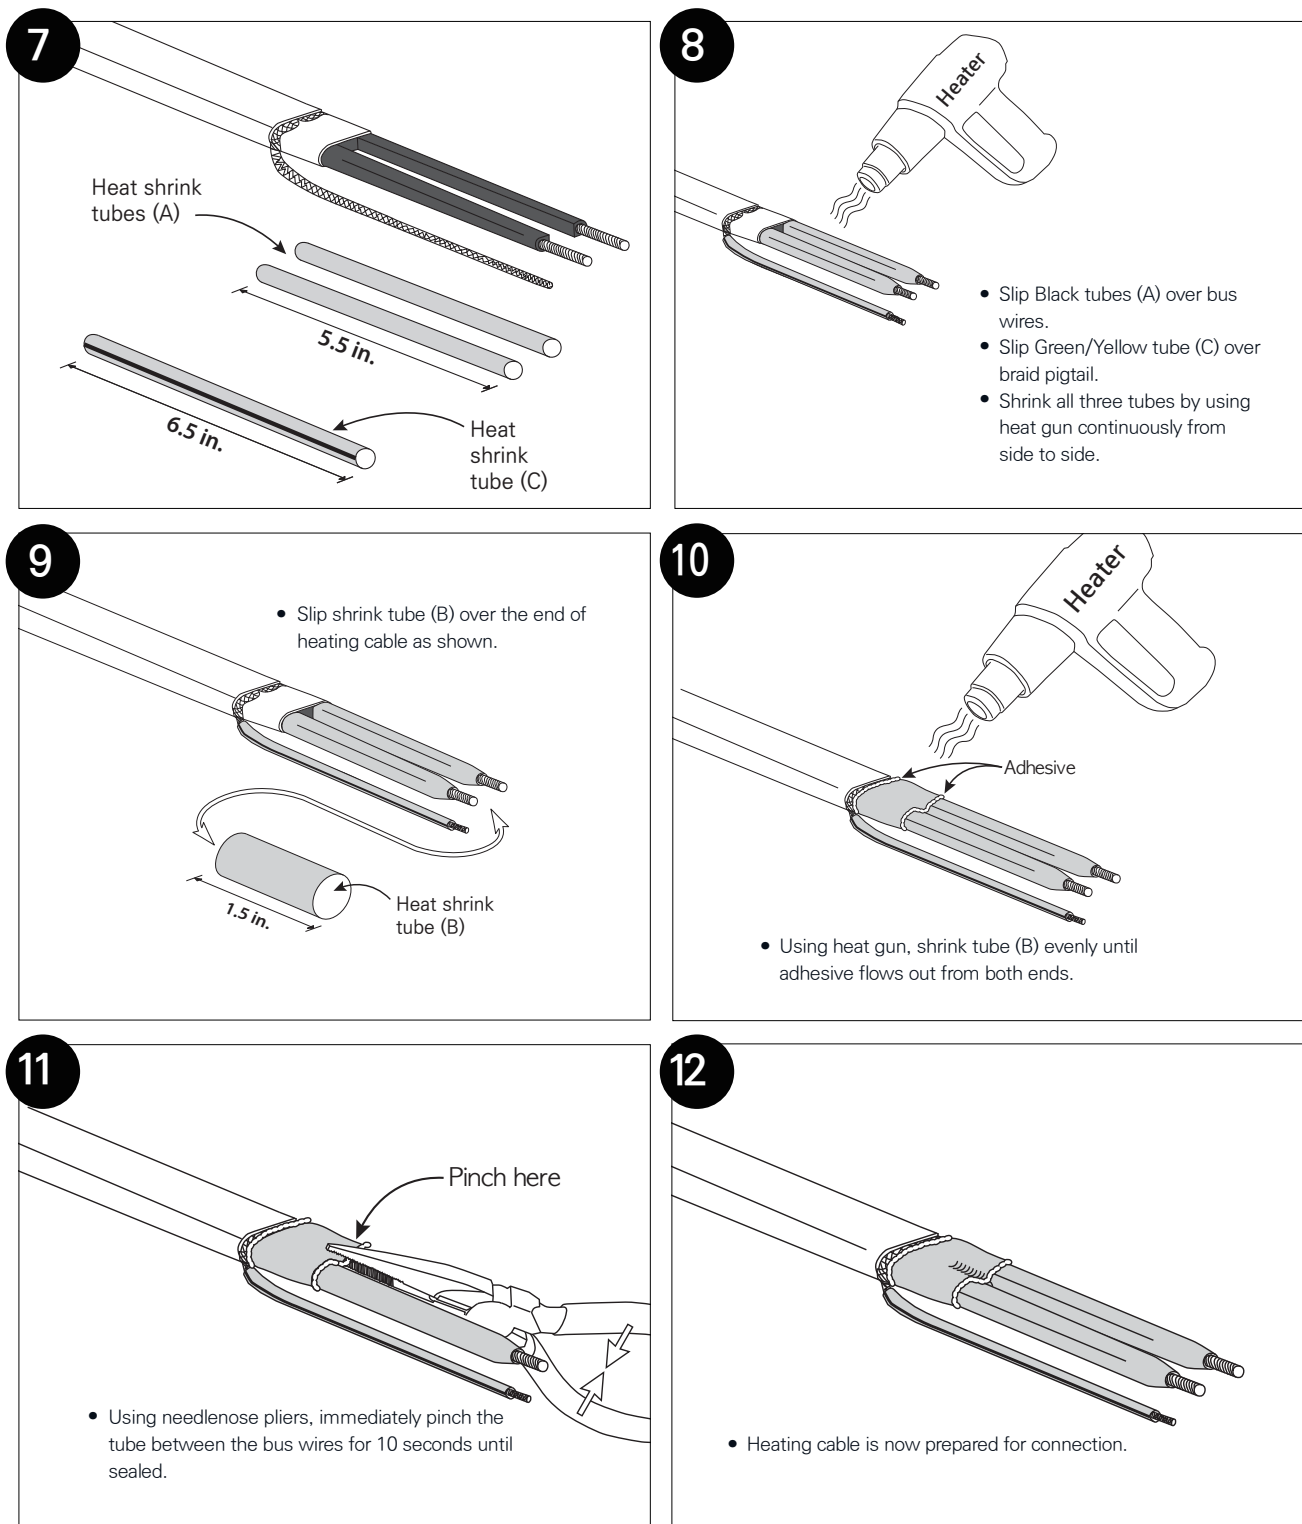

HT-CPCG-1

Hard-Wired Power Connection Kit

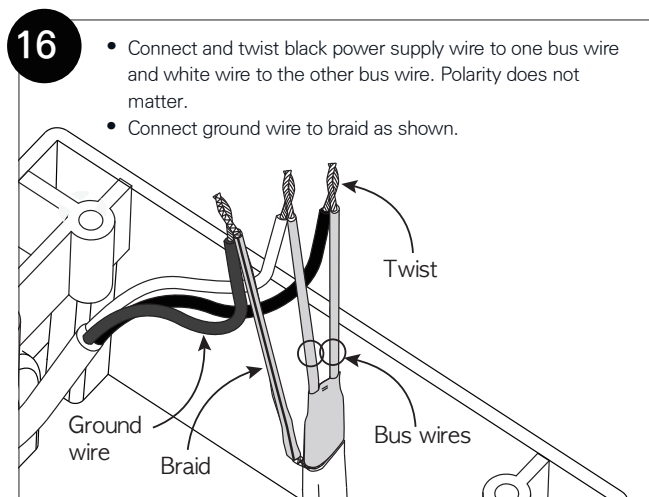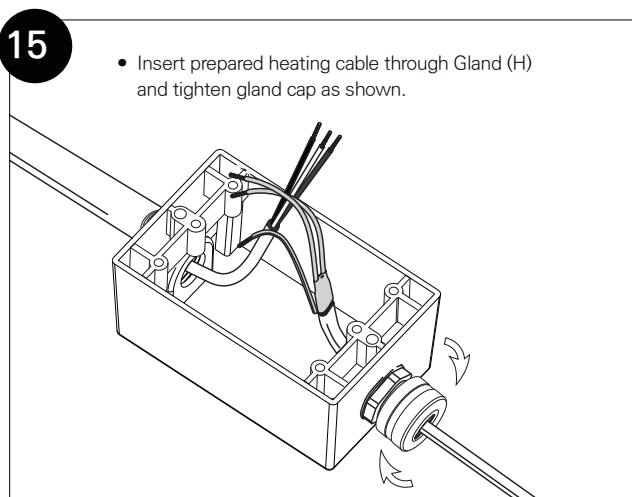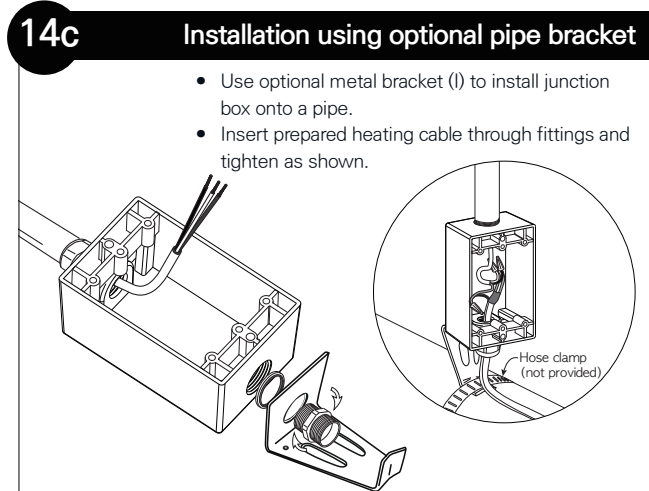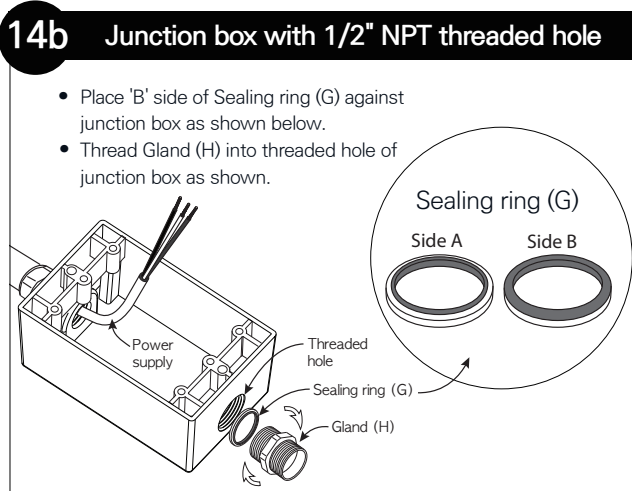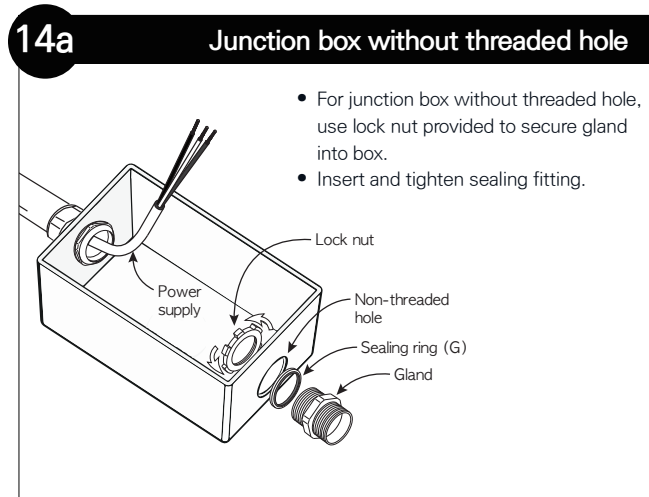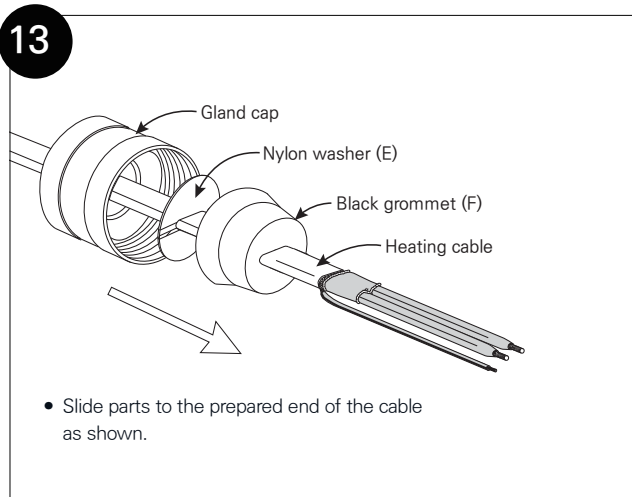

HT-CPCG-1

Hard-Wired Power Connection Kit

