


Series

OTH5007

Non Programmable Electronic Thermostat

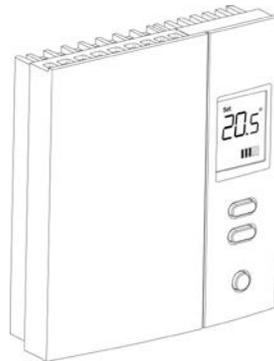

Features

Type	- Non programmable electronic proportional pulsing thermostat.
Color	- Standard: white.
Voltage	- 277/347V, 50/60 Hz.
Rating	- Maximum load: 14.4A at 277/347V. - Minimum load: 1.25A at 277/347V.
Control	- 10-minute or 15-second cycle. - Resolution: ± 0.5 °C (1 °F). - Precision: ± 0.15 °C (0.27 °F) on 15-second cycle. - Precision: ± 0.5 °C (1 °F) on 10-minute cycle.
Temperature range	- 5 °C (41 °F) to 30 °C (86 °F).
Display	- Digital screen. - Display ambient temperature and heating level indicator (in continuous), setpoint temperature setting (on demand), fan-forced heater mode and keypad lock (when activated).
Other feature	- Choice of temperature display format (°C or °F). - Temperature setpoints recorded permanently in case of a power outage.
Installation	- Ability to set minimum and maximum setpoints. - 2-wire thermostat, easy to install. - Adapter plate for 347V junction box included.
Application	- Baseboard heater, radiant ceiling, radiant floor (without floor sensor), convactor (short cycle) and fan-forced convactor (long cycle).
Warranty	- 3-year warranty against defects.

Model

Product #	Description	Volts	Watts	Qty
OTH5007	Non programmable electronic proportional pulsing thermostat	277/347	4000/5000	

Standard color is white.

Specifications may change without prior notice

Project:	Approval Information
Consultant Engineer:	
Electrician Contractor:	
Distributor:	
Date:	
Contact in Indeeco:	
Comments:	