

Engineered for easy installation, Indeeco Enclosure Heaters feature a unique design that simplifies setup and gets equipment up and running faster.


Construction Features

- Corrosion-Resistant Mounting Bracket offers maximum protection from accidental contact while allowing continuous air circulation
- Rugged 304 SST Tubular Element
- Sealed Element to prevent moisture absorption
- #8-32 Screw Tabs for convenient electrical connections
- Easy Installation - Multiple 3/8" diameter mounting holes

Optional Features

- Custom wattages/voltages
- Custom dimensions/sizes
- Custom mounting brackets and shrouds
- Thermostat


Compact Design

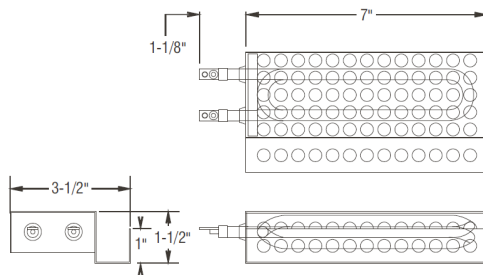

Certifications




per UL standard 499. UL file E147211
CSA listed to standard C22.2 no. 72
File #151727

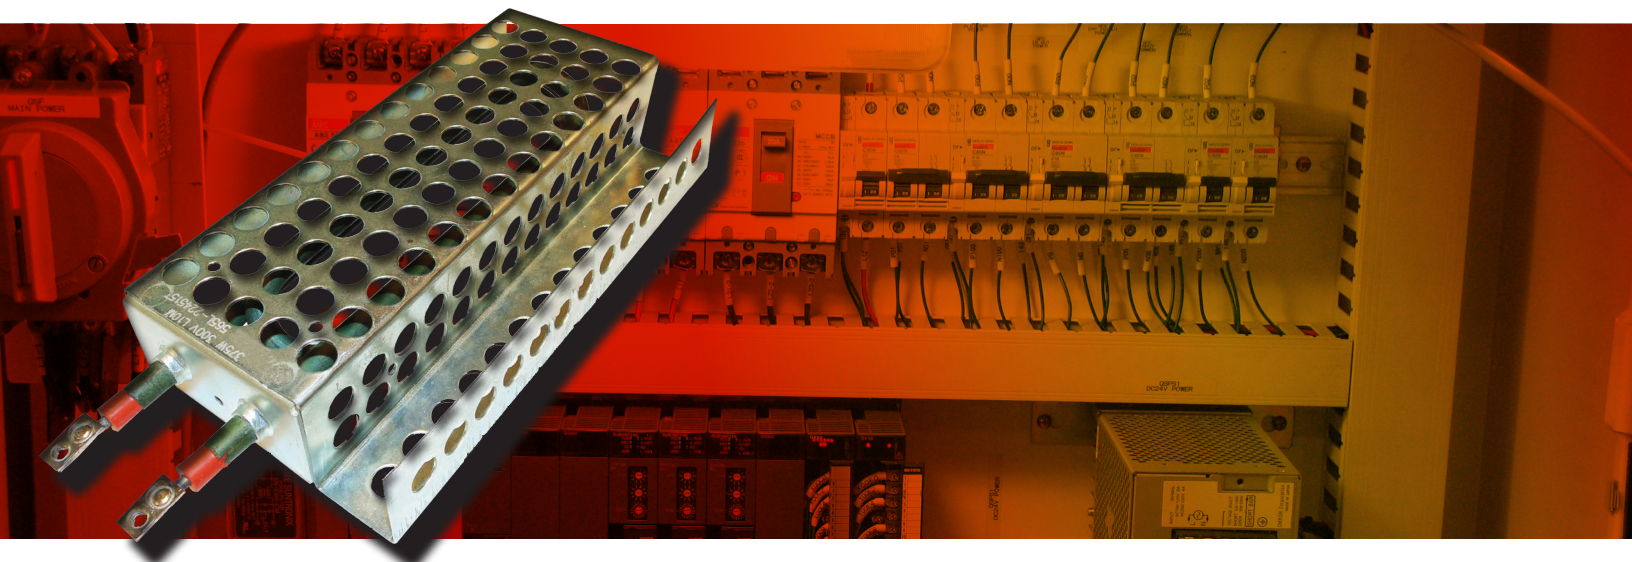

Our products do more in a wide range of applications. **Expect More.**

HX SERIES ENCLOSURE HEATERS

WITH THERMOSTAT 30°F - 150°F

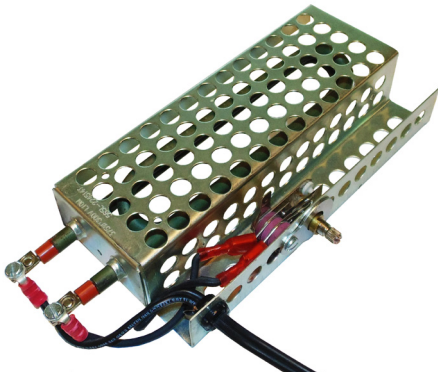

Shown with optional thermostat

Watts	Operating Voltage	Max Current	Stocked	Catalog Number	Part Number	Stocked	Part Number
100	125	0.80	Y	276-1	HX-565002	Y	HX-565002T
100	250	0.40	Y	276-2	HX-565003	N	HX-565003T
125	120	1.04	Y	276-19	HX-565060**	Y	HX-565060T**
125	240	0.52	Y	276-27	HX-565070	N	HX-565070T
150	120	1.25	Y	276-24	HX-565071	Y	HX-565071T
150	240	0.63	Y	276-17	HX-565079	N	HX-565079T
250	125	2.00	Y	276-3	HX-565004	Y	HX-565004T
250	250	1.00	Y	276-4	HX-565005	Y	HX-565005T
300	125	2.40	N	276-7	HX-565008	N	HX-565008T
300	250	1.20	N	276-8	HX-565009	N	HX-565009T
350	125	2.80	Y	276-5	HX-565006	Y	HX-565006T
350	250	1.40	Y	276-6	HX-565007	Y	HX-565007T
375	125	3.00	Y	276-10	HX-565011	Y	HX-565011T
375	250	1.50	Y	276-11	HX-565012	N	HX-565012T
500	120	4.17	Y	276-20	HX-565061**	Y	HX-565061T**
500	240	2.08	Y	276-19	HX-565060**	Y	HX-565060T**

Stocked items can ship in 24 HRS ARO on orders of 10 or less. Orders exceeding 10 units please contact factory.

Non-stocked items ship in three (3) weeks ARO.

Thermostat option adds 1" to the width of the unit.

* Items are dual rated.

**CSA Only.



FIELD UPGRADE ENCLOSURE HEATER


Indeco Field Upgrade Heating Units offer the same basic design as the Indeco Enclosure Heater with the benefit of expanded voltage ranges.

Heater can be wired directly to incoming power source, eliminating the need to increase the transformer size to accommodate an enclosure heater.

WITH THERMOSTAT 30°F - 150°F

Watts	Operating Voltage	Max Current	Height	Width*	Length	Stocked	Part Number
250	460	.54 A	2.625"	5.250"	10.50"	N	739DR286599
203	415	.49 A					
170	380	.45 A					

Includes thermostat dial, 22 ga 304 SST shroud, UL Recognized and CSA Listed Component, Delivery 4 weeks ARO



We support our customers with the tools and information they need to do extraordinary things. Discover More.