

**Series**

## **OTH3000P Programmable Electronic Thermostat**



CSA-C828-13 Performance Standard  
ICES-003 Standard Compliant

### **Features**

**Type**  
**Color**  
**Voltage**  
**Rating**


**Control**

**Temperature range**  
**Display**

**Program**  
**Mode**  
**Other feature**

**Installation**  
**Application**  
**Warranty**

- Programmable electronic proportional pulsing line voltage thermostat.
- Standard: white.
- 120/208/240V, 50/60 Hz.
- Maximum load: 11.5A at 120/208/240V.
- Minimum load: 1.25A at 120/208/240V.
- 10-minute cycle (fan-forced convector) or 15-second cycle (convector).
- Resolution: 0.5 °C (1 °F).
- Precision: ± 0.15 °C (0.27 °F) on 15-second cycle.
- Precision: ± 0.5 °C (0.1 °F) on 10-minute cycle.
- 5 °C (41 °F) to 30 °C (86 °F).
- Digital screen with white LED backlit.
- Display fan-forced heater mode and keypad lock (when activated).
- Choice of temperature display format (°C or °F) and time format (24h or 12h).
- Programming available up to 4 periods a day.
- Automatic, Manual, Economy, Freeze, Standby.
- Temperature setpoints recorded permanently in case of a power outage.
- Ability to set minimum and maximum setpoints.
- Night light mode for the display LED.
- Early start of the heating period.
- 2-wire thermostat, easy to install.
- Baseboard heater, radiant ceiling, convector and fan-forced convector.
- **3-year warranty against defects.**

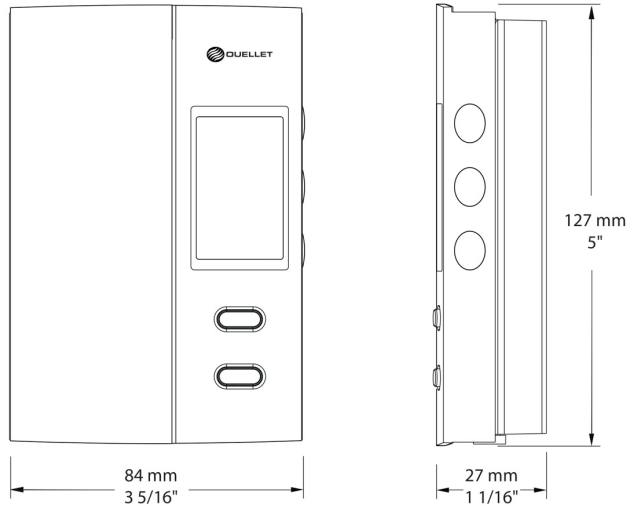

### Model

Product #	Description	Volts	Watts	Qty
OTH3000P	Programmable electronic proportional pulsing line thermostat	120/208/240	1380/2390/3000	

Standard color is white.

### Specifications may change without prior notice

Project:	Approval Information
Consultant Engineer:	
Electrician Contractor:	
Distributor:	
Date:	
Contact in Factory:	
Comments:	